## AF/ArmaFlex® class 0



## THE FLEXIBLE & SUSTAINABLE INSULATION SYSTEM FOR ENERGY EFFICIENCY & CONDENSATION CONTROL - TRUSTED FOR OVER 40 YEARS

- Closed cell material
- Built in water vapour barrier reducing the risk of corrosion under insulation (CUI)
- FM approved
- Built-in Microban® antimicrobial protection reduces mould and bacteria growth
- Low thermal conductivity value (0.033 W/m K @ 0°C)
- Euroclass B/B<sub>L-</sub>s3, d0
- BRE Green Guide A rating
- CE marked, EN 14304
- Highest system reliability when installed with ArmaFix pipe supports and ArmaFlex adhesives
- Available in handy self-seal tube format to speed up install times




















## **PROPERTIES**

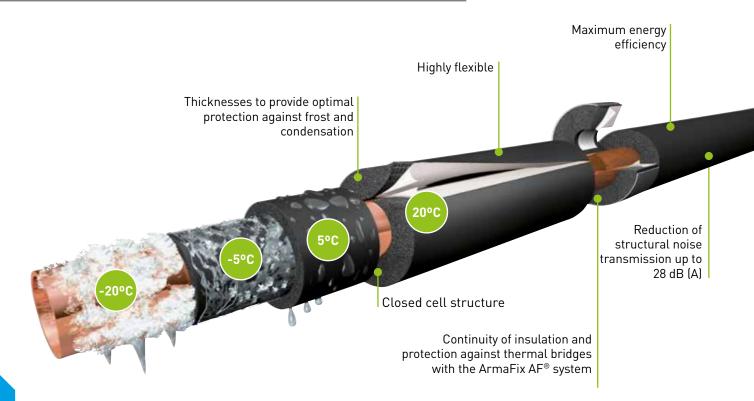



- Euroclass B, -s3, d0
- λ 0°C ≤ 0,033 W/(m·K)
- µ ≥ 10,000

for more information consult technical data



## **COMPLETE SYSTEM**

